

PROFOIL PANEL SYSTEM



Un prodotto e tante soluzioni
per una posa creativa, pratica e veloce.

PROFOIL PANEL sono pannelli in polistirene estruso con una densità di 48 kg/m³, rivestiti su entrambi i lati con una membrana impermeabile all'acqua e al vapore. I pannelli, idonei per applicazioni interne, sono irrigiditi, oltre che dalla membrana impermeabile, dall'adesivo utilizzato per il suo fissaggio e sono progettati e testati per la resistenza e la durata nel tempo. Per tale motivo sono quindi idonei come supporto per la posa di piastrelle, per impermeabilizzare e per realizzare strutture e pareti portanti. I pannelli sono disponibili con uno spessore di 6.35 / 9.5 / 12.7 / 15.9 / 25 / 38,1 e 50,8 mm e una dimensione di 91,5 x 152,4 / 270 cm. PROFOIL PANEL, che consente di realizzare il lavoro in modo rapido ed economico, è idoneo in ambienti interni con funzione termoisolante a pavimento, rivestimento e soffitto. I pannelli possono essere applicati su muri grezzi, su vecchi sottofondi e pavimenti, su strutture fisse in legno e metallo, per la realizzazione di pareti divisorie, top per cucine, lavabi mensole e mobili di vario tipo.

One product and many solutions for
a creative, practical and fast installation.

PROFOIL PANEL is a range of panels in extruded polystyrene with a density of 48 kg/m³. They are covered on both sides with a water and vapour-proof membrane. The panels, suitable for indoor applications, are stiffened, by the waterproof membranes and the adhesive used for their fixing. The panels are designed and tested to have mechanical resistance and long durability. For this reason they are therefore suitable as support for laying the tiles, to waterproof and create structures and load-bearing walls. The panels are available in a thickness of 6.35 / 9.5 / 12.7 / 15.9 / 25 / 38.1 and 50.8 mm and a size of 91.5 cm x 152.4 cm / 270 cm. PROFOIL PANEL, which allows the work to be carried out quickly and inexpensively, is suitable for indoor application with a thermal insulation function on floor, wall and ceiling. The panels can be applied on rough walls, on old supports and floors, on fixed structures in wood and metal, for the realization of partitions walls, tops for kitchens, washbasins, shelves and furniture of different types.

ESEMPI DI APPLICAZIONI PER I DIVERSI SPESORI / EXAMPLES OF APPLICATIONS FOR DIFFERENT THICKNESSES:



Spessore / Thickness 6,9 mm



Spessore / Thickness 12, 16, 25 mm




Spessore / Thickness 25, 38, 50 mm


PROFOIL PANEL NICHE




PFLPANICH 88




PFLPANICH 1212



PFLPANICH 821



PFLPANICH 1221

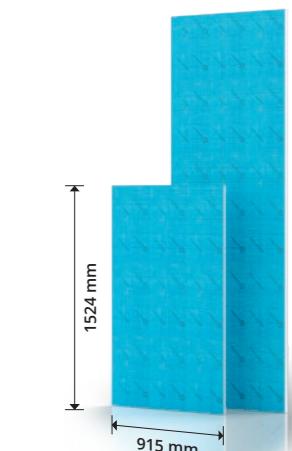

Temporaneamente non vendibile in Germania
Temporarily not salable in Germany

PROFOIL TASSELLI
PROFOIL DOWELS



PROFOIL RONDELLE
PROFOIL WASHERS
(metallo zincato / zinc-coated metal)



PROBAND NET



PROBAND 150



PROBAND FIX



PROFOIL VITI (metallo zincato)
PROFOIL SCREWS (zinc-coated metal)

